

QYI454C





THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY12 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature 环境温度	40 °C	Method of Cooling 冷却方式	Air cooling 风冷						
Temperature Rise 温升	125 °C	Direction of Rotation 旋转方向	Clockwise 顺时针						
Insulation Class 绝缘等级	H	Maximum Over-speed 最高转速	2250r/min						
Power Factor 功率因数	0.8	Degree of Protection / Enclosure 防护等级	IP23						
Excitation 励磁方式	Brushless 无刷	Altitude 海拔	1000m						
Winding Pitch 绕组节距	2/3	Stator winding 定子绕组	双层叠绕绕组 DLL						
Pole 极数	4	Number of Terminal 终端数量	6						
Duty 工作制	S1- Continuous	Rotor 转子	With damping cage 带阻尼						
Waveform 电话干扰因数	TIF<50		THF<2%						
Waveform distortion 波形畸变率	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N								
Radio interference 无线电干扰	Noload<1.5%,Non-distorting balanced linear load<5%								
AVR MODEL AVR 型号	Standard 标配	Selection 选配							
	MX341B	MX321	PMG MX341B MX321						
Voltage Regulation - in steady state condition 电压调节	±0.5	±0.5	±0.5 ±0.5						
Short Circuit Current Capacity 短路电流容量	5400A								
Electrical Characteristic									
Frequency 频率	Hz	50				60			
Voltage (series star)电压 Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star)电压 YY	V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Voltage (series delta)电压 Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise 额定功率在H(125 °C)温升	kVA	1505	1550	1550	1520	1705	1815	1855	1890
	kW	1204	1240	1240	1216	1364	1452	1484	1512
Efficiency at Class H (P.F.=0.8)绝缘等级H (P.F.=0.8)效率	4/4%	95.2	95.3	95.4	95.7	95.2	95.2	95.3	95.4
	3/4%	96	96.1	96.2	96.1	95.8	95.9	95.9	96
	2/4%	95.9	96	95.9	95.9	95.4	95.6	95.6	95.6
Efficiency at Class H (P.F.=1.0)绝缘等级H (P.F.=1.0)效率	4/4%	96.3	96.4	96.5	96.7	96.2	96.2	96.4	96.4
	3/4%	96.9	97	97	97	96.7	96.8	96.8	96.9
	2/4%	96.8	96.8	96.8	96.8	96.5	96.5	96.6	96.7
Reactances (%) at Class H 绝缘等级H考核时的电抗									
Direct axis synchronous reactance unsaturated 直轴同步电抗	X _d	3.18	2.96	2.75	2.4	3.86	3.67	3.43	3.21
Direct axis transient reactance saturated 直轴瞬态电抗	X' _d	0.19	0.18	0.17	0.15	0.23	0.22	0.21	0.2
Direct axis subtransient reactance saturated 直轴瞬变电抗	X'' _d	0.14	0.13	0.12	0.11	0.17	0.16	0.15	0.14
Quadrature axis synchronous reactance unsaturated 交轴同步电抗	X _q	2.05	1.91	1.77	1.55	2.49	2.37	2.22	2.07
Quadrature axis subtransient reactance saturated 交轴起始瞬态电抗	X' _q	0.29	0.27	0.25	0.22	0.35	0.33	0.31	0.29
Leakage reactance 漏抗	X _l	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04
Negative sequence reactance saturated 负序电抗饱和	X ₂	0.2	0.19	0.18	0.15	0.25	0.23	0.22	0.21
Zero sequence reactance unsaturated 零序电抗不饱和	X ₀	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03
Short-circuit ratio 短路比	K _{cc}	0.3145	0.3378	0.3636	0.4167	0.2591	0.2725	0.2915	0.3115
Short-circuit transient time constant (sec.) 瞬变时间常数 (秒)	T' _d	0.135							
Subtransient time constant (sec.) 超瞬变时间常数 (秒)	T'' _d	0.01							
Open circuit time constant (sec.) 开路时间常数	T' _{do}	2.23							
Armature time constant (sec.) 电枢时间常数	T _a	0.02							
Stator Winding Resistance (20°C) 定子绕组电阻(20°C)	ohm	0.00126							
Rotor Winding Resistance (20°C) 转子绕组电阻(20°C)	ohm	1.4							
Exciter Stator Resistance (20°C) 励磁机定子电阻(20°C)	ohm	17.5							
Exciter Rotor Phase resistance 励磁机转子相电阻	ohm	0.063							
No load excitation current 空载励磁电流	io (A)	0.6	0.63	0.71	0.65	0.56	0.6	0.62	0.63
Full load excitation current 满载励磁电流	ic(A)	3.2	3.2	3.5	3.2	3.4	3.3	3.4	3.5
Cooling air requirement 空气冷却要求	m ³ /sec	2.69m ³ /s 5200cfm				3.45m ³ /s 7300cfm			
Mechanical Characteristic									
Configuration 结构		Single Bearing 单轴承				Double Bearing 双轴承			
Type of Construction 结构形式		B2-SAE				IM B34			
Total Weight - kgs 总重量-公斤		3015				2965			
Weight wound stator - kgs 定子重量-公斤		1445				1445			
Weight wound rotor - kgs 转子重量-公斤		1257				1195			
Inertia (J) [kgm ²] 转动惯量 (J) [kgm ²]		37.3309kgm ²				36.33kgm ²			
Drive end bearing / Lubrication 驱动端轴承/润滑						BALL.6228-2RS(ISO)			
Non-drive end bearing / Lubrication 非驱动端轴承/润滑		BALL.6319-2RS(ISO)				BALL.6319-2RS(ISO)			
Packing crate size 包装尺寸 (cm)		186X105X149				205X101X159			

50
Hz

QYI454C
Winding 312





THREE PHASE EFFICIENCY CURVES

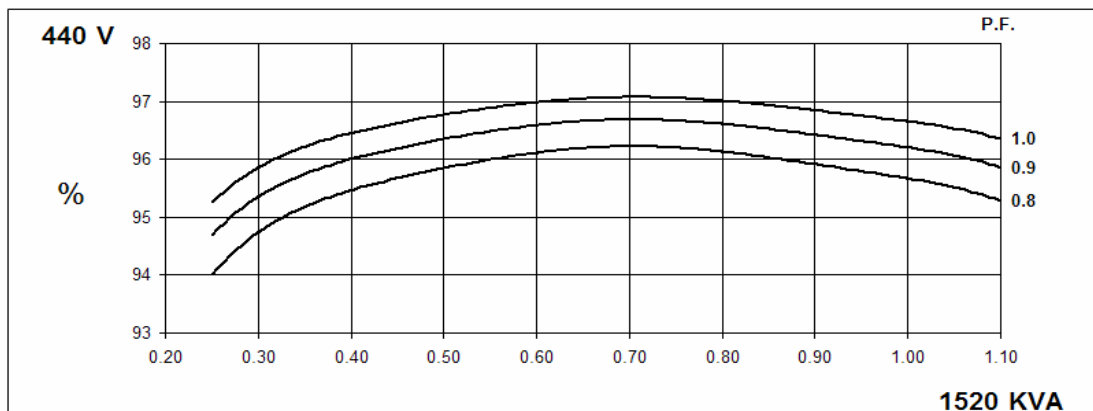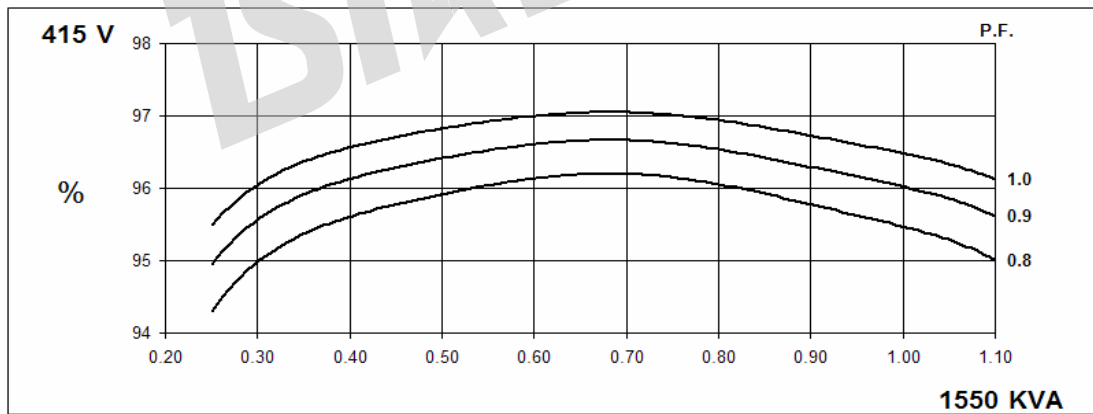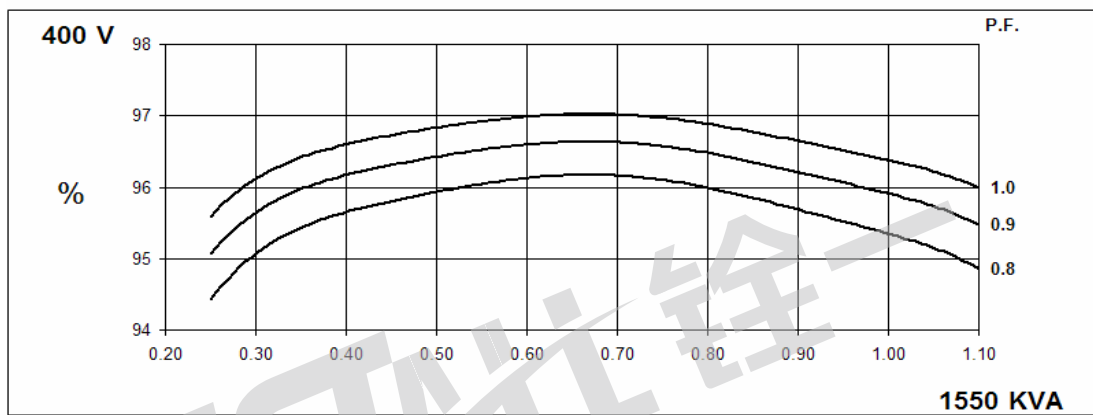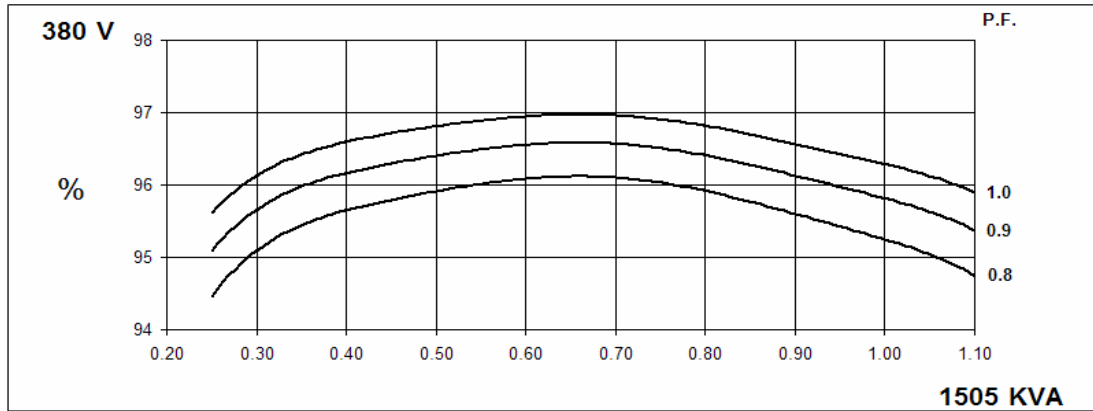

60
Hz

QYI454C
Winding 312


THREE PHASE EFFICIENCY CURVES

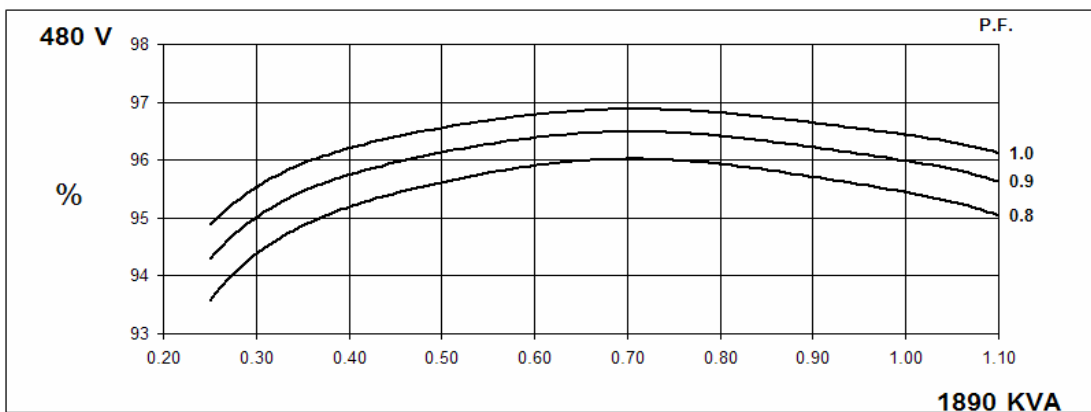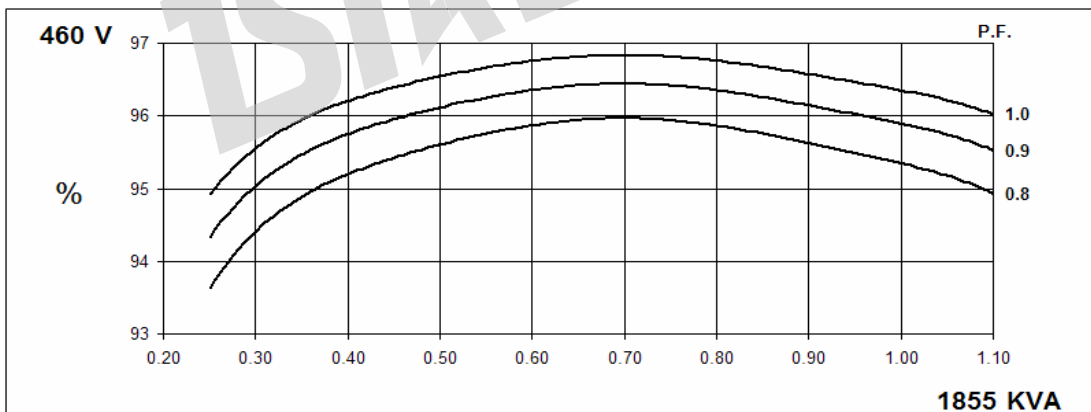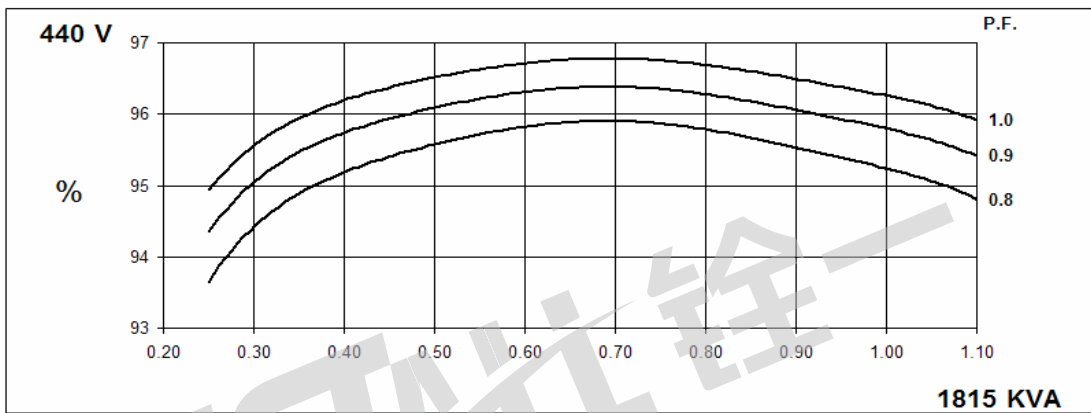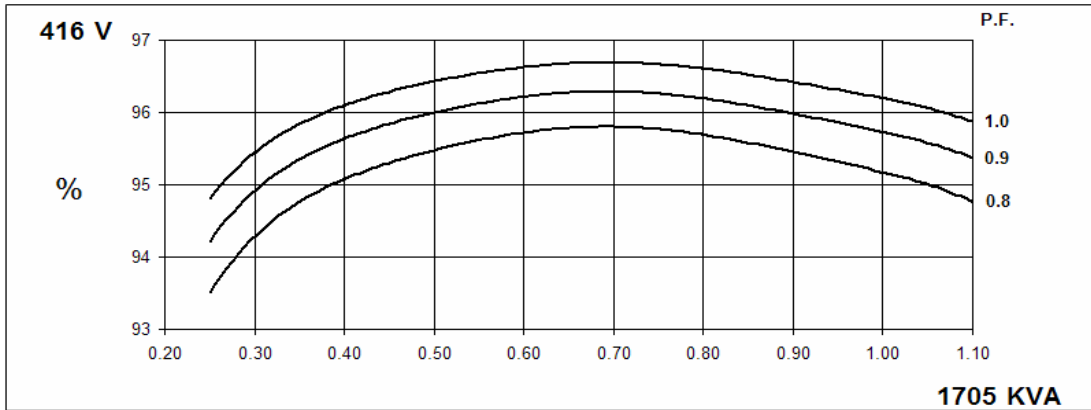


QYI454C

Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

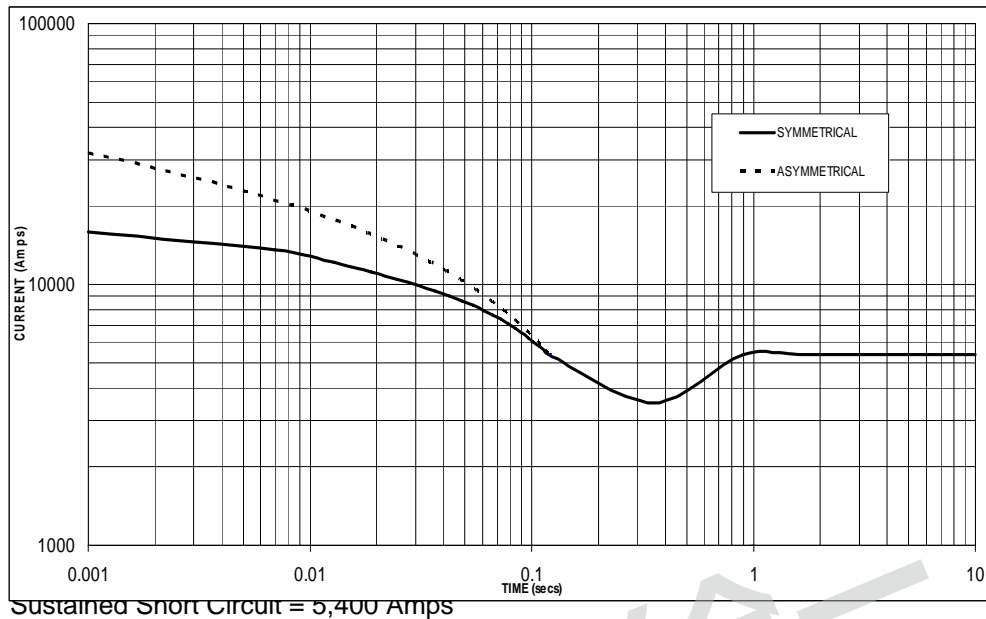

60
Hz

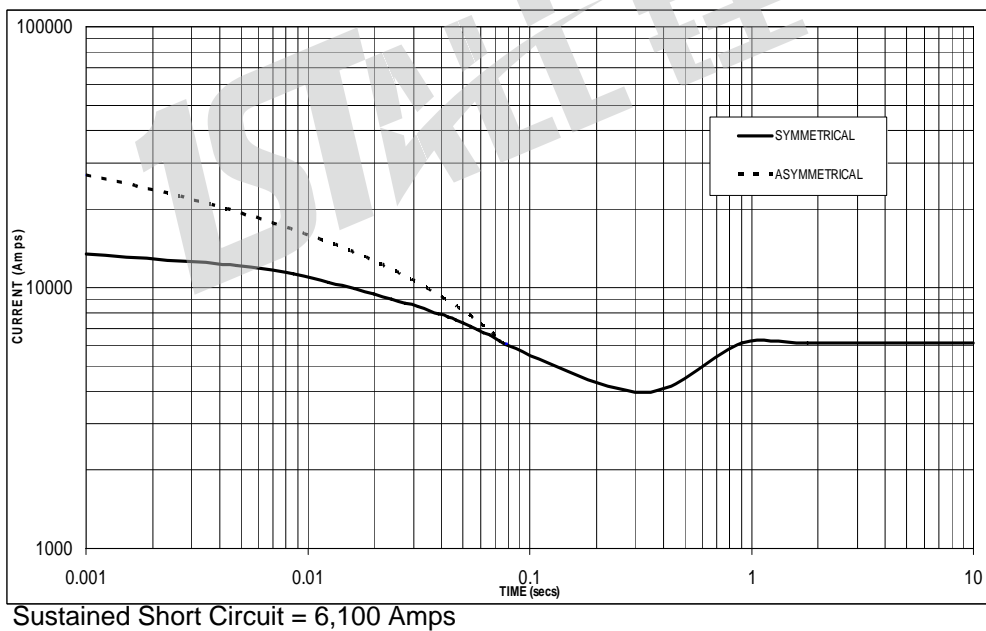

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	x 1.00	416v	x 1.00
400v	x 1.05	440v	x 1.06
415v	x 1.09	460v	x 1.10
440v	x 1.16	480v	x 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines.

QYI454C


Winding 312 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	1400	1445	1445	1415	1505	1550	1550	1520	1570	1615	1615	1590	1615	1660	1660	1630
	kW	1120	1156	1156	1132	1204	1240	1240	1216	1256	1292	1292	1272	1292	1328	1328	1304
	Efficiency (%)	95.4	95.5	95.6	95.8	95.2	95.4	95.5	95.7	95.1	95.2	95.4	95.6	95.0	95.1	95.3	95.5
	kW Input	1174	1210	1209	1182	1265	1300	1298	1271	1321	1357	1354	1331	1360	1396	1393	1365

60Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	1590	1690	1725	1760	1705	1815	1855	1890	1770	1890	1930	1970	1820	1945	1985	2025
	kW	1272	1352	1380	1408	1364	1452	1484	1512	1416	1512	1544	1576	1456	1556	1588	1620
	Efficiency (%)	95.3	95.4	95.5	95.6	95.2	95.2	95.3	95.4	95.1	95.1	95.2	95.3	95.0	95.0	95.2	95.3
	kW Input	1335	1417	1445	1473	1433	1525	1557	1585	1489	1590	1622	1654	1533	1638	1668	1700

DIMENSIONS

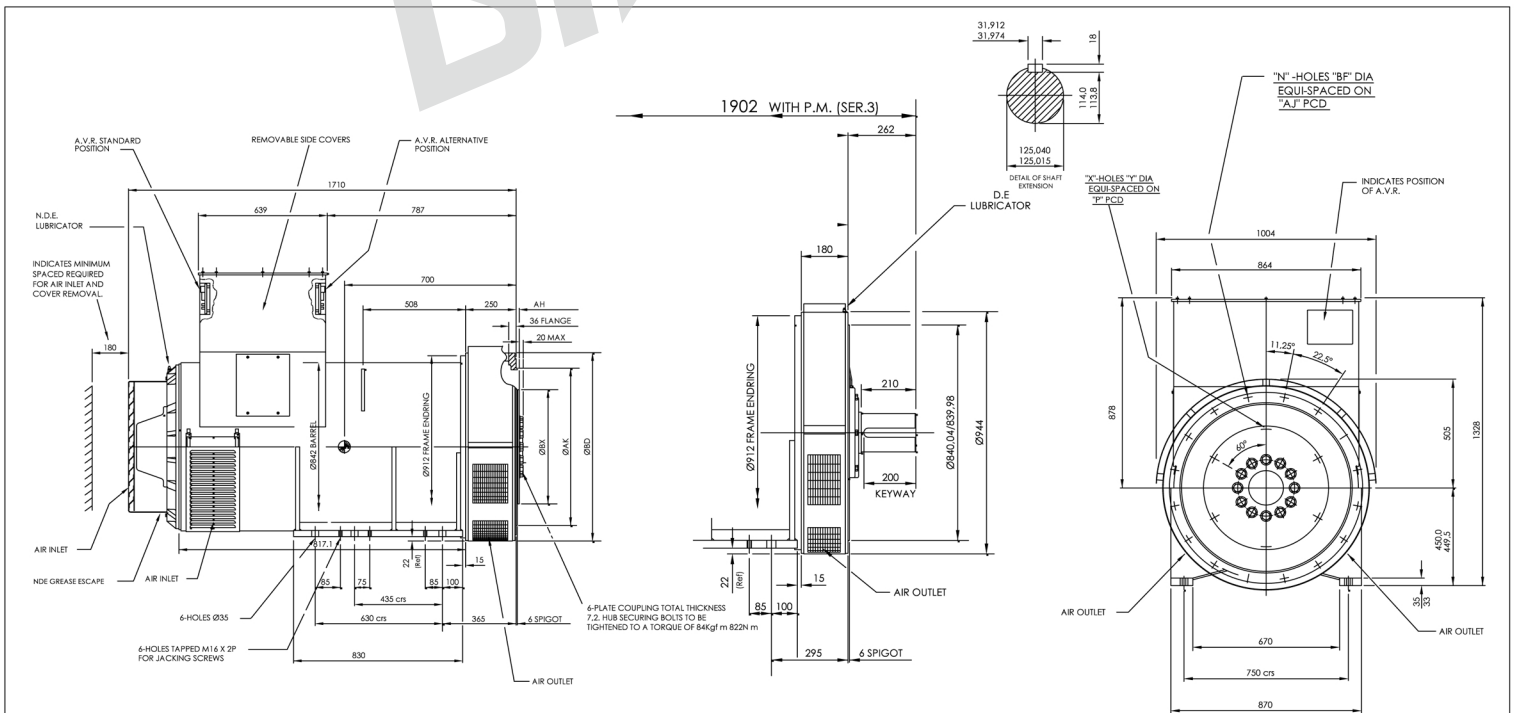

COUPLING DISC					
SAE	BX	P	X	Y	AH
24	733.375	692	12	20.7	0
21	673.10	641.35	12	16.7	0
18	571.50	542.92	6	16.7	15.7
14	466.72	438.15	8	13.5	25.4


FLANGE (mm)						
SAE	BD	AK	AJ	U ^o	BF	n
SAE1	553	511.18	530.22	15	12.7	12
SAE1/2	648	584.20	619.12	15	14	12
SAE0	711	647.70	679.45	11.25	14	16
SAE00	882	787.40	850.90	11.25	14	16

			QYI 454C	1:1	QT002Z037.3
				A2	
VER	MOD	DRW	Date		
Design		APP			
CHK		Date	2018.01	GB/T1804-m	mm

QYI454C

Winding 311

INERTIA

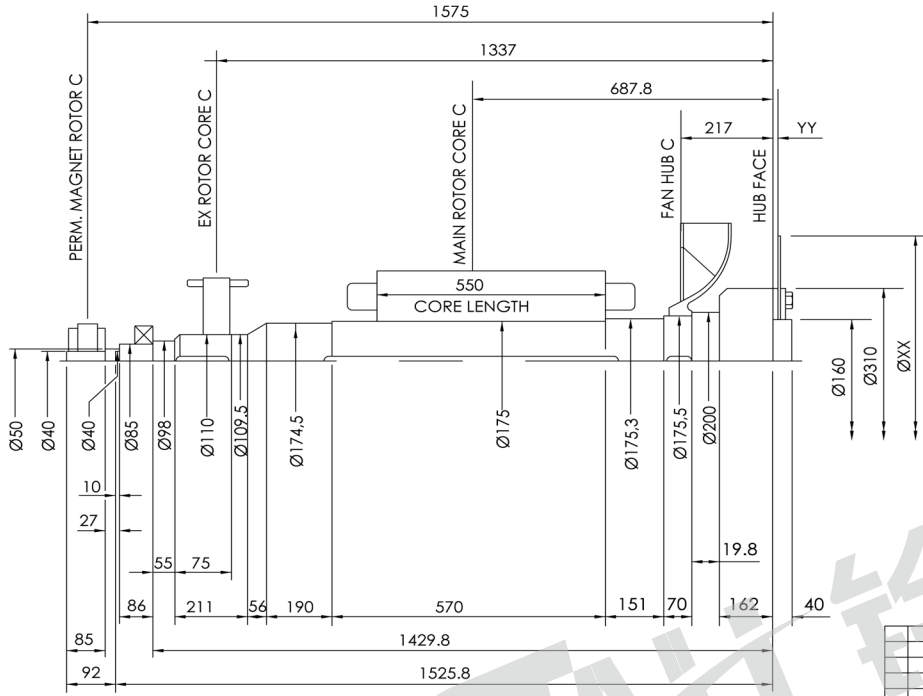

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	51.6	0.859
MAIN ROTOR	847.654	32.9794
FAN	28.8	1.652
SHAFT	260.055	0.9638
HUB	53.533	0.8846
P.M.EX.ROTOR	6.97	0.019
P.M. STUB SHAFT	0.929	0.0003
TOTAL	1249.541	37.3581

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
18	572	16	24.5	0.59
21	673	0	23.1	1.135
24	733	0	26.84	1.598

QYI 454C		1:1	0QY201077
INERTIA			
VER	MOD	DRW	Date
Design		APP	
CHK		Date	2018.01
			mm

