

QYI314D

THREE-PHASE SYNCHRONOUS GENERATOR WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

THREE-PHASE SYNCHRONOUS GENERATOR									
WINDING QY311 Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm									
Ambient Temperature	40 ℃	Method of Cooling				Air cooling			
Temperature Rise	125 ℃	Direction of Rotation				Clockwise			
Insulation Class	H	Maximum Over-speed				2250r/min			
Power Factor	0.8	Degree of Protection / Enclosure				IP23			
Excitation	Brushless	Altitude				1000m			
Winding Pitch	2/3	Stator winding				DLL			
Pole	4	Number of Terminal				12			
Duty	S1- Continuous	Rotor				With damping cage			
Waveform	TIF<50					THF<2%			
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N								
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%								
AVR MODEL AVR	Standard	Selection				PMG			
	AS440	KRS440			MX341B	MX321			
Voltage Regulation - in steady state condition	± 1. 0	± 1. 0			±0.5	±0.5			
Short Circuit Current Capacity	Control does not sustain a short circuit current					1450A			
Electrical Characteristic									
Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 ℃) temperature rise	kVA	300	300	300	290	344	360	375	375
	kW	240.0	240.0	240.0	232.0	275.2	288.0	300.0	300.0
Efficiency at Class H (P.F.=0.8)	4/4%	92.7	93	93.1	93.6	92.8	93	93	93.1
	3/4%	93.8	94	94	94.1	93.8	94	94	94
	2/4%	94.2	94.2	94.1	94	94	94	94	94
Efficiency at Class H (P.F.=1.0)	4/4%	94.2	94.5	94.7	95	94.3	94.4	94.5	94.7
	3/4%	95.2	95.3	95.4	95.5	95.1	95.2	95.2	95.2
	2/4%	95.5	95.5	95.4	95.3	95.2	95.3	95.3	95.3
Reactances (%) at Class H									
Direct axis synchronous reactance unsaturated	Xd	3.16	2.85	2.65	2.28	3.6	3.37	3.21	2.95
Direct axis transient reactance saturated	X'd	0.2	0.18	0.17	0.15	0.22	0.21	0.2	0.18
Direct axis subtransient reactance saturated	X''d	0.14	0.13	0.12	0.1	0.15	0.14	0.14	0.12
Quadrature axis synchronous reactance unsaturated	Xq	2.66	2.4	2.23	1.92	3.09	2.89	2.75	2.53
Quadrature axis subtransient reactance saturated	X''q	0.39	0.36	0.33	0.28	0.4	0.38	0.36	0.33
Leakage reactance	Xl	0.07	0.06	0.06	0.05	0.09	0.09	0.08	0.07
Negative sequence reactance saturated	X2	0.26	0.24	0.22	0.19	0.28	0.27	0.25	0.23
Zero sequence reactance unsaturated	X0	0.1	0.09	0.08	0.07	0.1	0.09	0.09	0.08
Short-circuit ratio	Kcc	0.3165	0.3509	0.3774	0.4386	0.2778	0.2967	0.3115	0.3390
Short-circuit transient time constant (sec.)	T'd	0.08							
Subtransient time constant (sec.)	T''d	0.019							
Open circuit time constant (sec.)	T'do	1.7							
Armature time constant (sec.)	Ta	0.018							
Stator Winding Resistance (20℃)	ohm	0.0124							
Rotor Winding Resistance (20℃)	ohm	1.04							
Exciter Stator Resistance (20℃)	ohm	18							
Exciter Rotor Phase resistance	ohm	0.068							
No load excitation current	io (A)	0.5	0.52	0.6	0.6	0.5	0.51	0.6	0.6
Full load excitation current	ic(A)	2.1	2.1	2.2	2.2	2.1	2.1	2.2	2.2
Cooling air requirement	m ³ /sec	0.8m3/s 1700cfm				0.99m3/s 2100cfm			
Mechanical Characteristic									
Configuration	Single Bearing				Double Bearing				
Type of Construction	B2-SAE				IM B34				
Total Weight - kgs	878				868				
Weight wound stator - kgs	403				403				
Weight wound rotor - kgs	361				338				
Inertia (J) [kgm2]	4.0771kgm2				3.8783kgm2				
Drive end bearing / Lubrication					BALL.6317-2RS(ISO)				
Non-drive end bearing / Lubrication	BALL.6314-2RS(ISO)				BALL.6314-2RS(ISO)				
Packing crate size (cm)	122X70X104				133X70X104				


QYI314D

Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	280	280	280	270	300	300	300	290	320	320	320	310	330	330	330	320
	kW	224	224	224	216	240	240	240	232	256	256	256	248	264	264	264	256
	Efficiency (%)	93.1	93.4	93.5	93.8	92.7	93.0	93.2	93.6	92.3	92.7	92.9	93.3	92.1	92.5	92.7	93.2
	kW Input	241	240	240	230	259	258	258	248	277	276	276	266	287	285	285	275
60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	315	335	345	345	344	360	375	375	365	385	400	400	375	395	415	415
	kW	252	268	276	276	275	288	300	300	292	308	320	320	300	316	332	332
	Efficiency (%)	93.3	93.3	93.4	93.6	92.9	93.0	93.1	93.3	92.5	92.6	92.7	93.0	92.4	92.5	92.5	92.8
	kW Input	270	287	296	295	296	310	322	322	316	333	345	344	325	342	359	358





DIMENSIONS

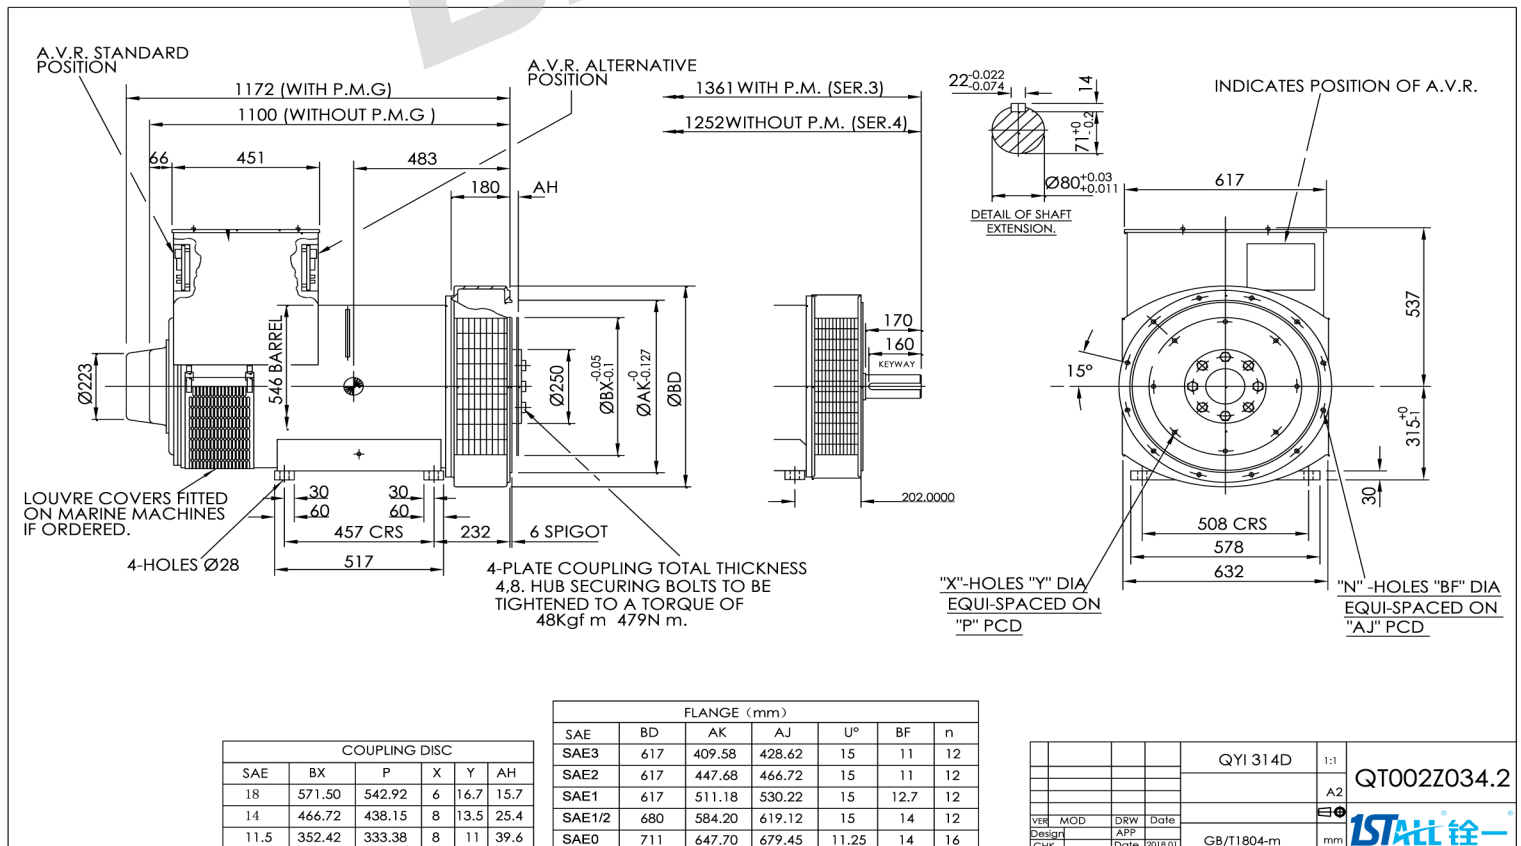

50
Hz

QYI314D
Winding 311

THREE PHASE EFFICIENCY CURVES

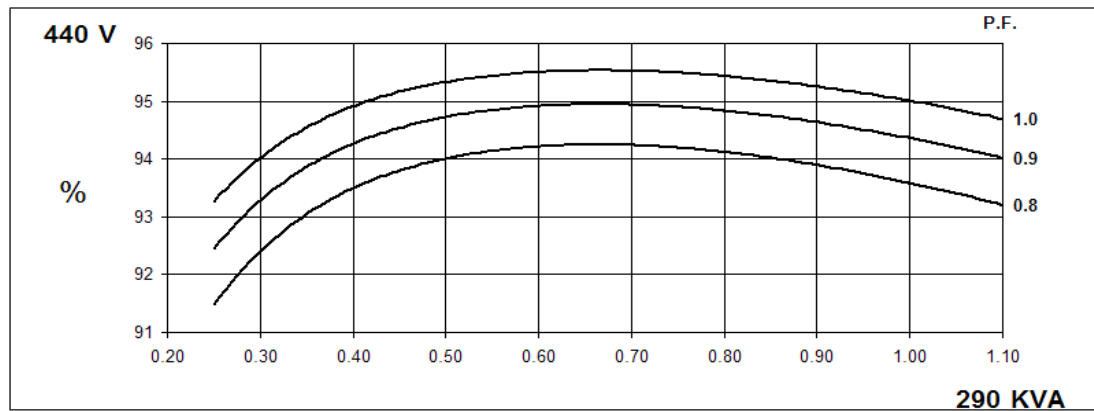
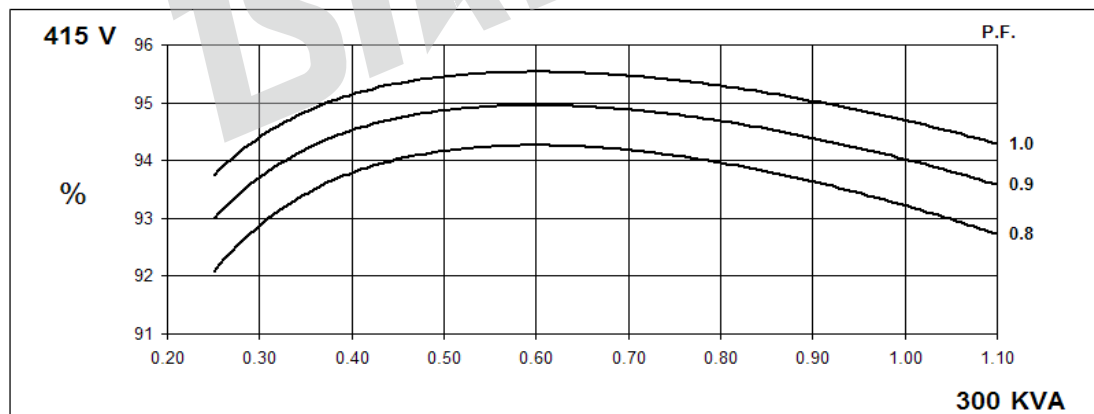
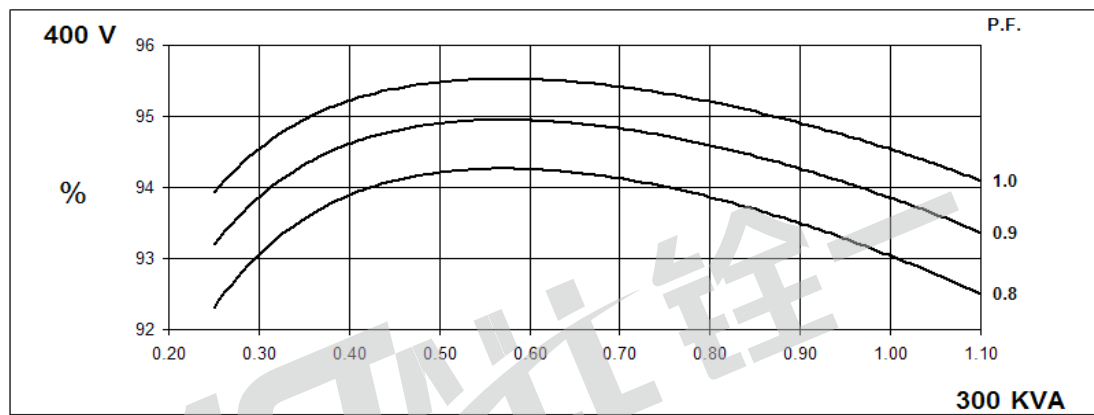
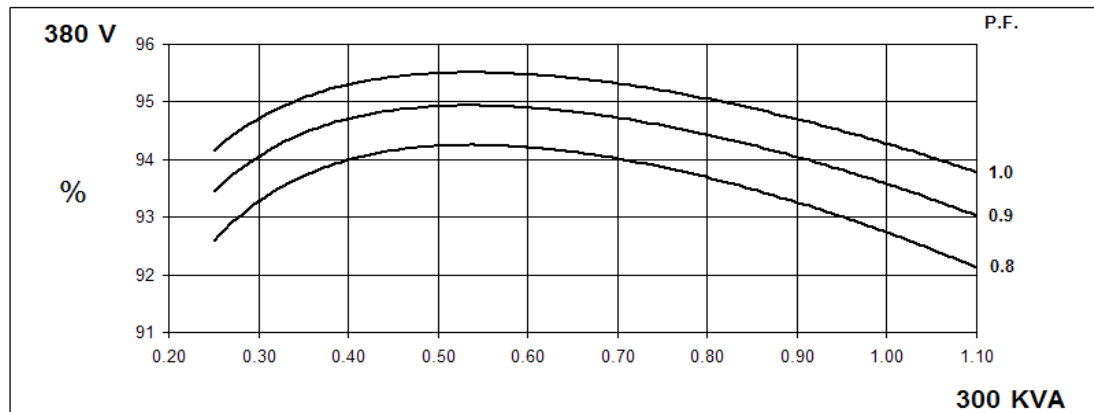


60
Hz

QYI314D

Winding 311


THREE PHASE EFFICIENCY CURVES

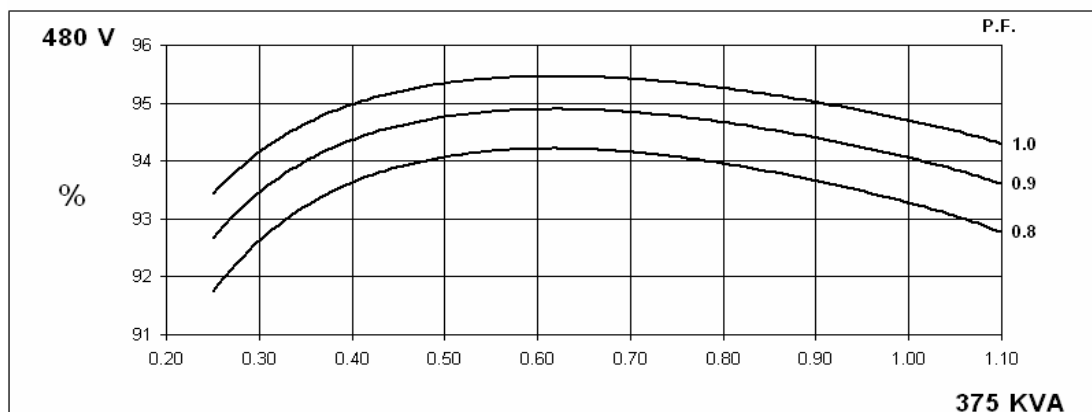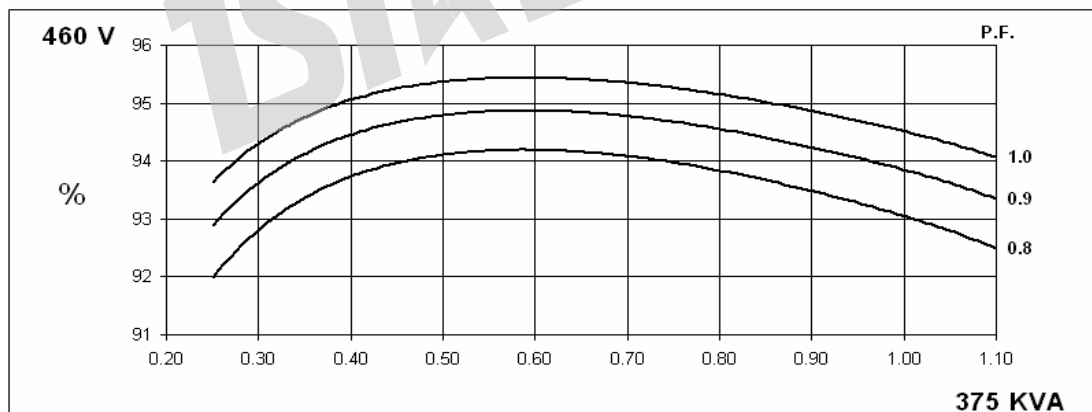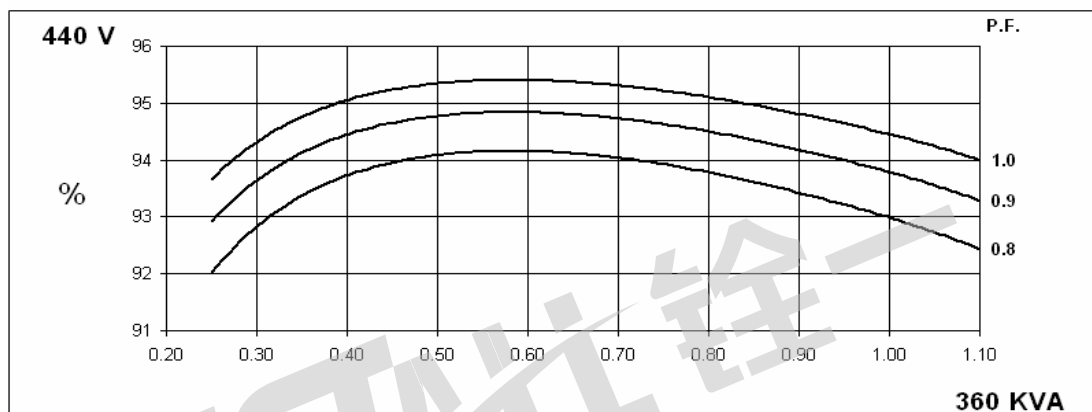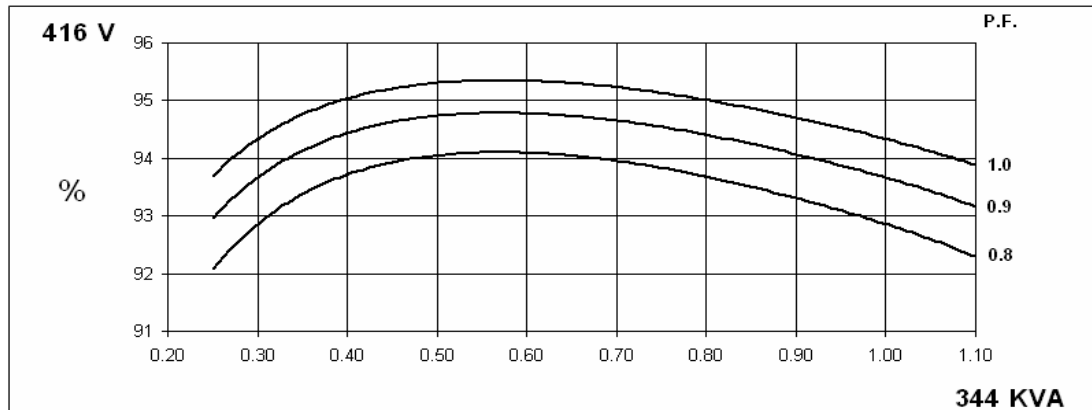

QYI314D


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

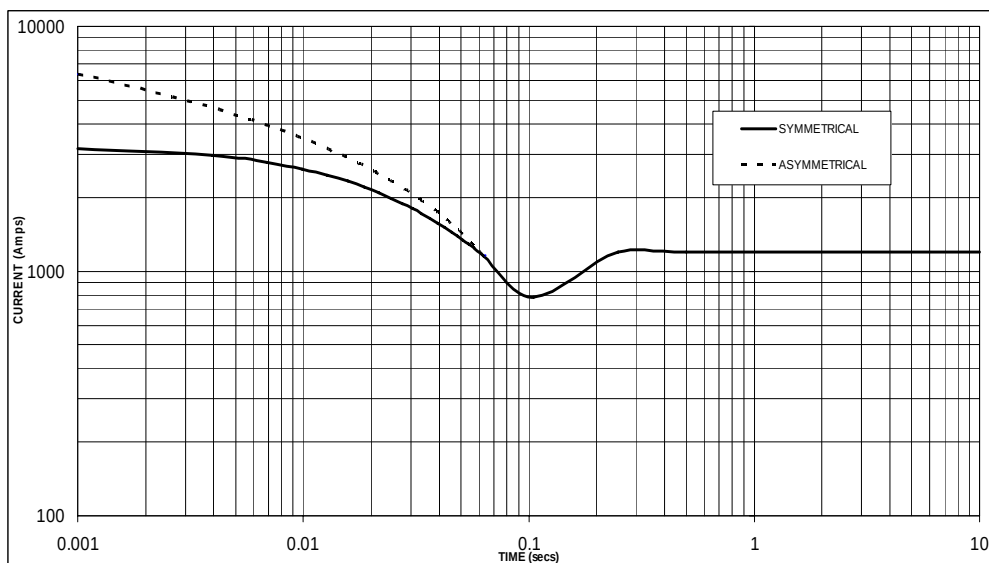

Sustained Short Circuit = 1,200 Amps

60
Hz

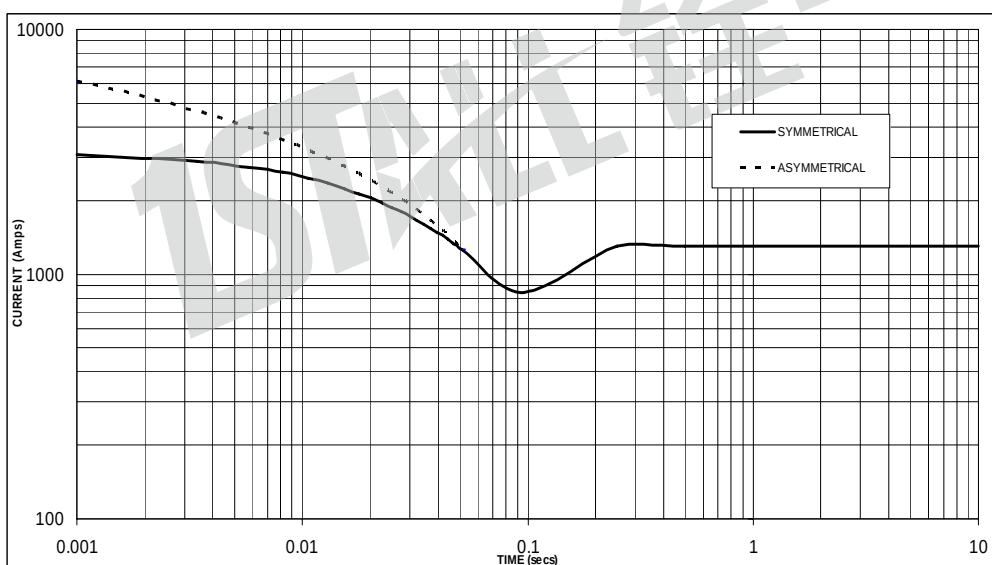

Sustained Short Circuit = 1,300 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.06
415v	X 1.09	460v	X 1.10
440v	X 1.16	480v	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :


	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

QYI314D
Winding 311
INERTIA

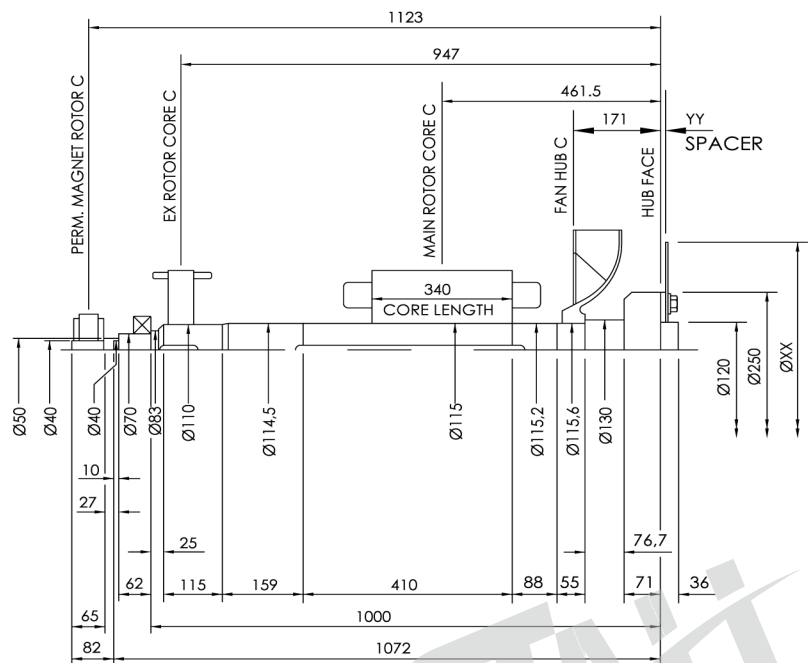

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	31,290	0,5100
MAIN ROTOR	208.88	2,969
FAN	9,910	0,2630
SHAFT	87,191	0,1450
HUB	18,507	0,1779
TOTAL	355.778	4.0649
PERM. MAG.	5.215	0.0122
TOTAL	360.993	4.0771

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
11,5	352	23,8	12,08	0,055
14	467	9,5	11,66	0,172
18	572	0,0	12,07	0,386

VER	MOD	DRW	Date	QYI 314D	1:1	0QY201047
Design		APP		INERTIA		
CHK		Date	2018.01		mm	